


EM10010 - 1200





SPECIFICATIONS:

- › **Voltage Input :** 12 VDC / 24 VDC
- › **Current Draw :** 12V / 420mA ; 24V / 210mA ($\pm 5\%$)
- › **Holding Force :** Up to 1200 lbs (545 kg)
- › **Anti-Rust Surface Treatment :** Blue Zinc Plating
- › **Operating Temperature :** 0~55° C (32~131° F)
- › **Operating Humidity :** 0~95% (non condensing)
- › **Weight (Magnet) :** 2.5 kg ($\pm 1\%$)
- › **Dimensions :** Magnet - (L)266x(W)67x(T)39 mm
Armature - (L)185x(W)61x(T)16.5 mm



FEATURES:

- › **Dual Voltage Selectable (12 VDC or 24 VDC)**
- › **Low Current Consumption**
- › **Reliable Holding Force**
- › **Durable and Silence Operation**
- › **Cosmeticize Anodized Aluminum Casing**
- › **Surge & Spike Protection PCB**
- › **Anti-Temper Jam Nuts**
- › **Full Range of Optional Brackets**
- › **Anti Residual Magnetism Kick Off Button**

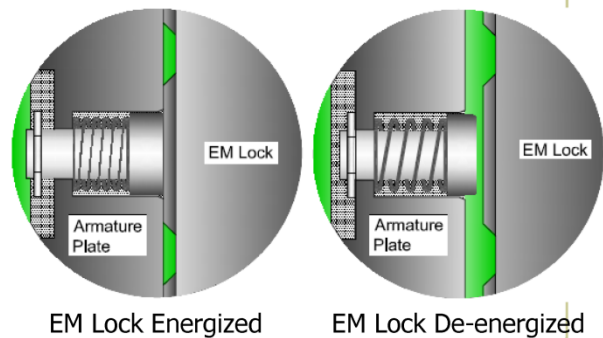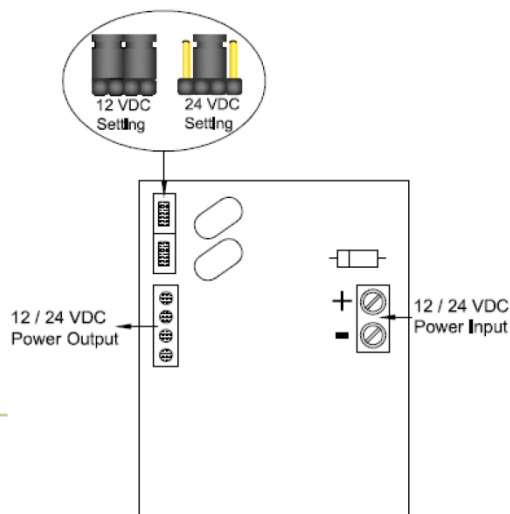

IMPORTANT!

Set the jumper position according to the power input correctly before switch ON the power.