



EM10005 – 600-Double-LED



SPECIFICATIONS:

- › **Voltage Input** : 12 VDC / 24 VDC (per Magnet)
- › **Current Draw** : 12V / 500mA ; 24V / 250mA ($\pm 5\%$)
- › **Holding Force** : Up to 600 lbs x2 (272 kg x2)
- › **Hall Effect Contact** : SPDT rated 2A at 24 VDC
- › **Anti-Rust Surface Treatment** : Blue Zinc Plating
- › **Operating Temperature** : 0~55° C (32~131° F)
- › **Operating Humidity** : 0~95% (non condensing)
- › **Weight (Magnet)** : 2.2 kg ($\pm 1\%$)
- › **Dimensions** : Magnet - (L)500x(W)42x(T)25 mm
Armature - (L)180x(W)38x(T)11 mm

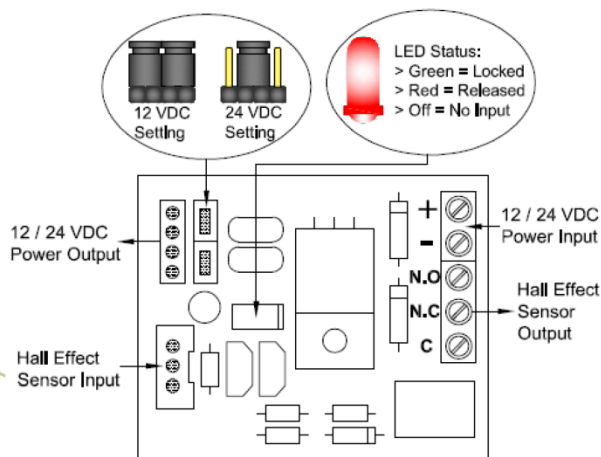


IMPORTANT!

Set the jumper position according to the power Input correctly before switch ON the power.




FEATURES:

- › **Ideal for Double Swing Doors**
- › **Dual Voltage Selectable (12 VDC or 24 VDC)**
- › **Low Current Consumption**
- › **Reliable Holding Force**
- › **Hall Effect Sensor Monitoring Output**
- › **Green/Red LED Indication for EM Lock Status**
- › **Durable and Silence Operation**
- › **Cosmeticize Anodized Aluminum Casing**
- › **Surge & Spike Protection PCB**
- › **Anti-Tamper Jam Nuts**
- › **Full Range of Optional Brackets**
- › **Anti Residual Magnetism Kick Off Button**



EM Lock Energized



EM Lock De-energized