


EM10002 – 600-LED-DS




SPECIFICATIONS:

- › **Voltage Input :** 12 VDC / 24 VDC
- › **Current Draw :** 12V / 500mA ; 24V / 250mA (±5%)
- › **Holding Force :** Up to 600 lbs (272 kg)
- › **Hall Effect Contact :** SPDT rated 2A at 24 VDC
- › **Magnetic Contact Rating :** 28 VDC, 0.5A, 10W
- › **Anti-Rust Surface Treatment :** Blue Zinc Plating
- › **Operating Temperature :** 0~55° C (32~131° F)
- › **Operating Humidity :** 0~95% (non condensing)
- › **Weight (Magnet) :** 1.1 kg (±1%)
- › **Dimensions :** Magnet - (L)250x(W)42x(T)25 mm
Armature - (L)180x(W)38x(T)11 mm



FEATURES:

- › **Dual Voltage Selectable (12 VDC or 24 VDC)**
- › **Low Current Consumption**
- › **Reliable Holding Force**
- › **Hall Effect Sensor Monitoring Output**
- › **Green/Red LED Indication for EM Lock Status**
- › **Built-in Mag.Contact for Door Status Monitoring**
- › **Durable and Silence Operation**
- › **Cosmeticize Anodized Aluminum Casing**
- › **Surge & Spike Protection PCB**
- › **Anti-Tamper Jam Nuts**
- › **Full Range of Optional Brackets**
- › **Anti Residual Magnetism Kick Off Button**

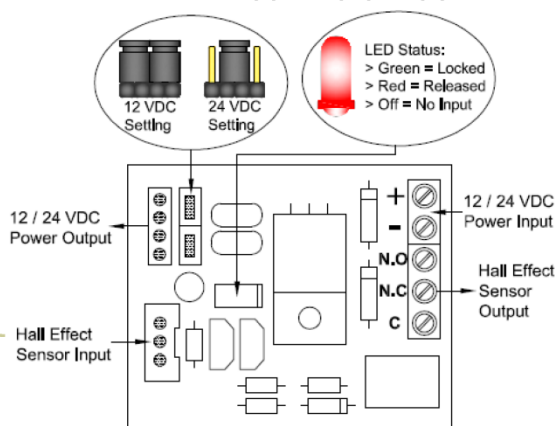

IMPORTANT!

Set the jumper position according to the power input correctly before switch ON the power.

