


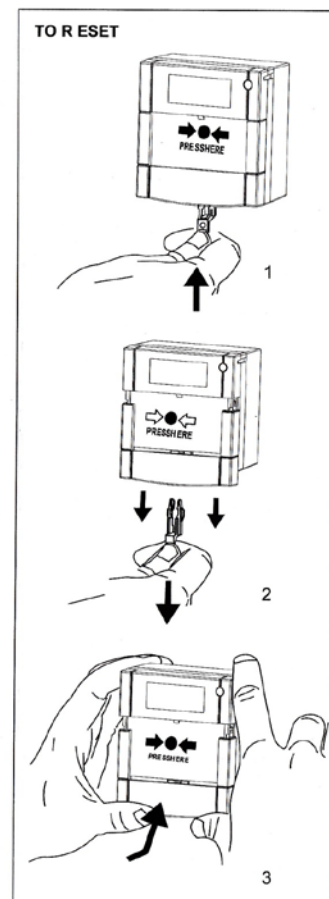
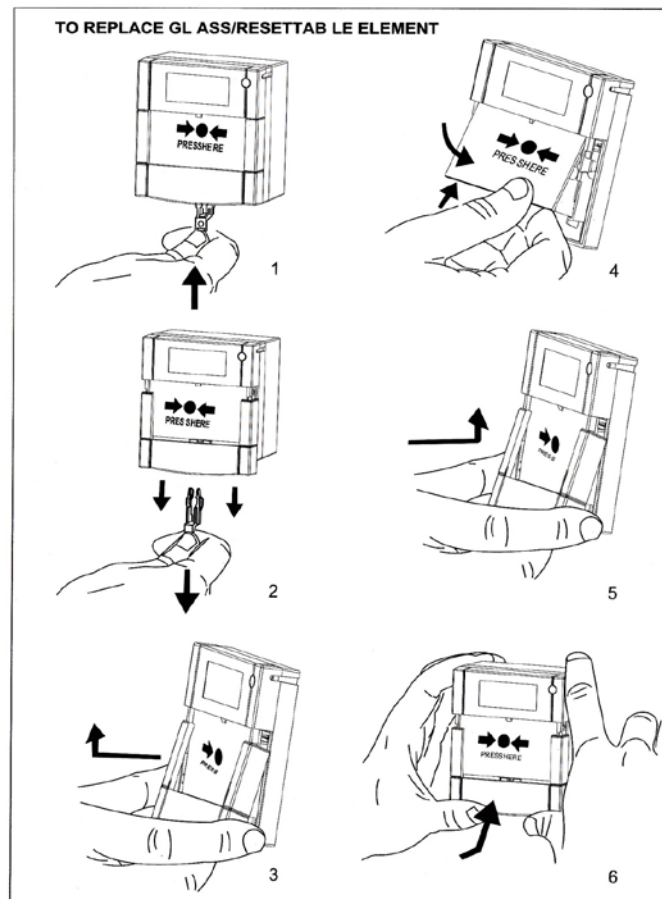


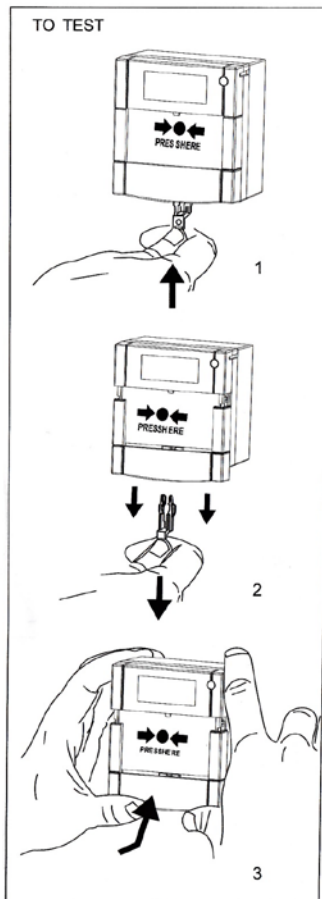



INSTALLATION INSTRUCTIONS FOR THE MANUAL CALL POINT MODELS BOPO-FW-1....,BOPO-FW-2....,BOPO-FW-470R....,BOPO-FW-470RL....

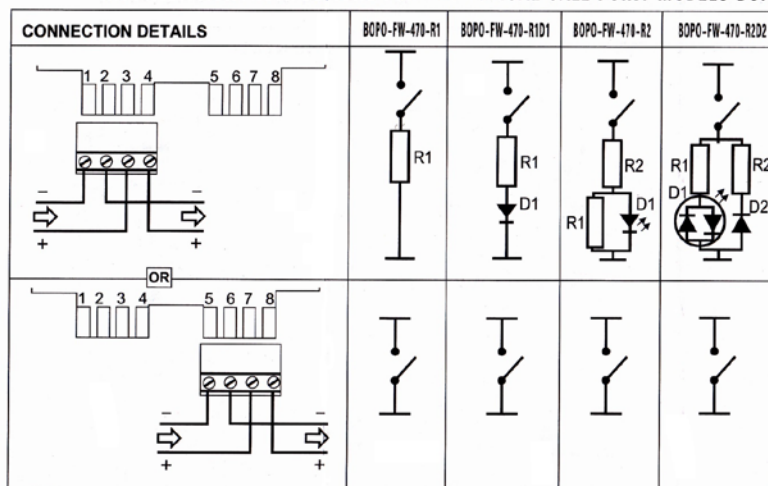

X in the BOPO-FW code (left) represents the final digits of the part number, which indicate BOPO-FW colour, component values, mounting options and element type.
eg BOPO-FW R470SF
(BOPO-FW, Red, 470R, Surface, Flexible Element).

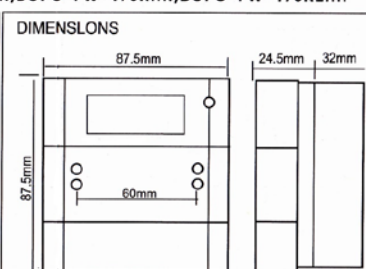

PUSH FIT CONNECTOR
After wiring the terminal connector, plug into the appropriate position, see connection details (left).

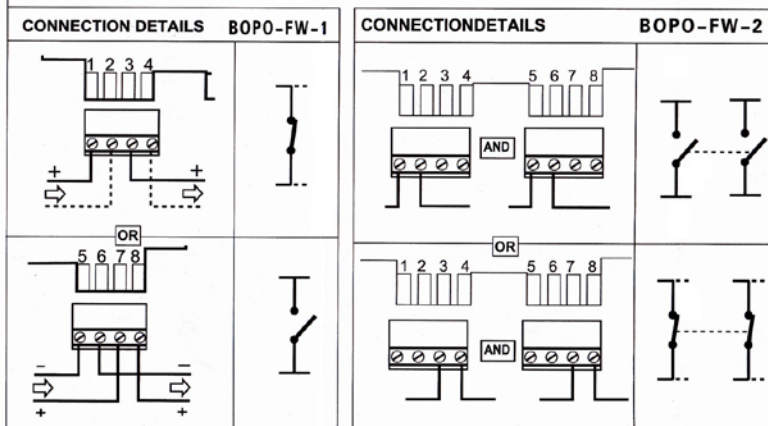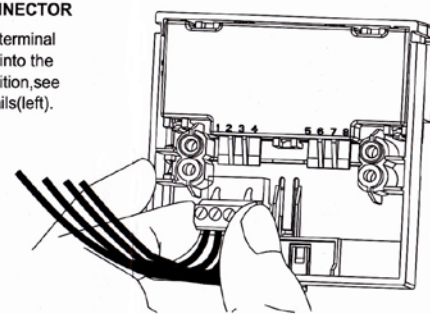

TECHNICAL DATA

30VDC Max
 2A Max
 IP24D
 110/160g

-30 °C to 70 °C
 Red, Ral 3001
 Yellow, Ral 1006
 Green, Ral 6016
 White, Ral 90010
 Blue, Ral 5002